

LUMEN SELECT™ COLOUR SELECT

ECO EMERGENCY BATTEN GEN3



PRODUCT DETAILS



Size: 2ft/600mm, 4ft/1200mm, 5ft/1500mm
 Rated life: L70 B50 54000hrs
 LED: Colour Select 4000K/5000K/6500K, CRI80, 5SDCM
 Beam angle: Symmetrical, 120°
 Driver: Integral, Lumen Select, Non dimmable, Flicker free design
 Emergency: Maintained, Manual test, Replaceable lithium iron phosphate (LiFeP04) battery, 18 months shelf life
 Rating: IP20, IK06, Class I
 Operating temperature: 0°C to +40°C
 Housing: Steel
 Finishing: White RAL9003, Powder coated
 Diffuser/Lens: Polycarbonate (PC), Frosted, Insect proof
 Connection: Removable LED module with quick release clips and connector, Ø20mm knockout for conduit or cable glands, Center cable entry, End to end mounting
 Warranty*: 5 year on fixture and lamp, 4 years on battery

MADE TO ORDER OPTIONS (LEAD TIME AND MOQ MAY APPLY)

Dimming, Non maintained emergency

APPLICATIONS

Surface mounted (ceiling/wall), Internal
 Commercial, Retail, Residential

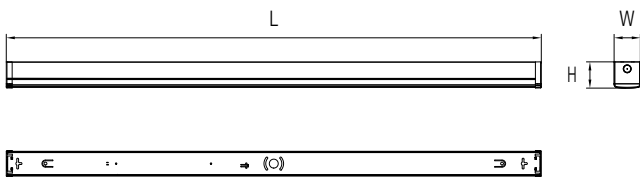

VERSION	L (MM)	W (MM)	H (MM)
ECOBAT202G3E1	603	74	74
ECOBAT404G3E1	1164	74	74
ECOBAT505G3E1	1500	74	74

CODE	DESCRIPTION	POWER	LUMENS	EFFICACY	WEIGHT
ECOBAT202G3E1	ECO BATTEN 2FT 18W 4/5/65K MAINT EMERG @ 4K MAINT MODE @ 4K EMERG MODE	18W	1900LM	106LM/W	1.10KG
		2W	200LM	100LM/W	
ECOBAT404G3E1	ECO BATTEN 4FT 20/26/31/37W 4/5/65K MAINT EMERG @ 4K MAINT MODE @ 4K EMERG MODE	20W	2400LM	120LM/W	1.80KG
		26W	3000LM	115LM/W	
		31W	3500LM	113LM/W	
		37W	3900LM	105LM/W	
		2W	200LM	100LM/W	
ECOBAT505G3E1	ECO BATTEN 5FT 29/37/45/52W 4/5/65K MAINT EMERG @ 4K MAINT MODE @ 4K EMERG MODE	29W	4000LM	138LM/W	2.10KG
		37W	5000LM	135LM/W	
		45W	5800LM	129LM/W	
		52W	6400LM	123LM/W	
		2W	200LM	100LM/W	

*Please refer to the warranty policy at www.pierlite.co.nz; "POWER" is tested system powers from luminaire; "LUMENS" is delivered lumens from luminaire, including thermal, electrical and optic losses; ^Figures are interpolated / extrapolated from data at other versions.