






## PIERLUX ECO LED G5 HIGHBAY

### PRODUCT DETAILS:

- Size: Ø295mm
- Rated life: L70/B50 50000hrs
- LED: CCT 5000K, CRI>80, 7 SDCM
- Beam angle: Symmetrical 115°
- Driver: Integral, 1-10V Dimming
- Rating: IP65, IK08, Class I
- Operating temperature: -30°C to +50°C
- Housing: Die-cast LM6 aluminium (low copper content <0.1%)
- Finishing: Powder coating, Black
- Diffuser/Lens: Polycarbonate, Clear
- Connection: 1.7m Flex & Plug, Safety wire
- Accessory: Surface mount kit, Polycarbonate reflector, Aluminium reflector, Aluminium dust cover
- Warranty: 5 year

### APPLICATIONS:

Suspended, Surface mount, Internal, External  
Warehousing, Industrial facilities, Workshops, Retail environments,  
Cold storage, Sports facilities

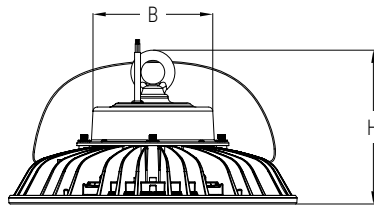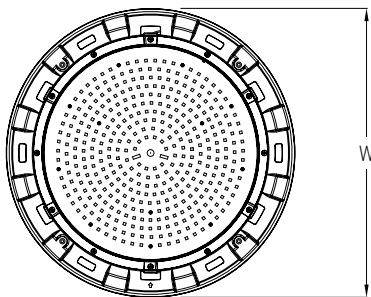

VERSION	W (MM)	B (MM)	H (MM)
120W 1-10V DIMMING	295	115	150

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>*</sup>	EFFICACY	WEIGHT
ECOHB120W850G5	120W 5000K CRI>80 1-10V DIM	119W	19184lm	161lm/W	3.0kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.