

STINGRAY G2 EXIT LIGHT



PRODUCT DETAILS:



- Viewing distance: 24m
- Rated life: L70/B50 50000hrs
- Driver: Integral
- Rating: IP20, Class II
- Operating temperature: 0°C to +40°C
- Housing: Polycarbonate, Complete with all pictogram inserts
- Finishing: White/Black
- Emergency: Maintained, Replaceable lithium iron phosphate (LiFeP04) battery, 18 months shelf life, Manual test
- Certification: Compliant to AS/NZS2293
- Connection/Installation: Suitable for both single sided and double sided applications
- Warranty: 5 years on fixture and lamp, 4 years on the battery

MADE TO ORDER OPTIONS:

IP65 Aqualock enclosure, DALI

APPLICATIONS:

Surface mount, Internal
Commercial, Schools, Retail, Hospitality, Apartments, Theatres and Cinemas

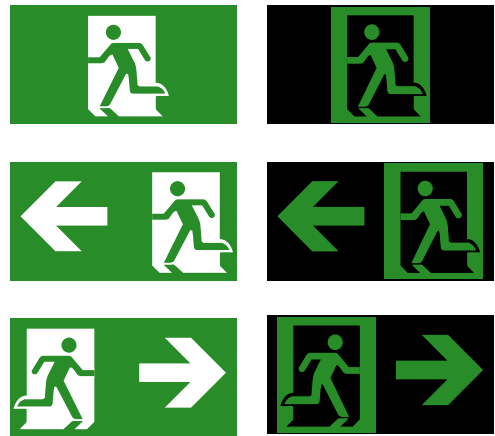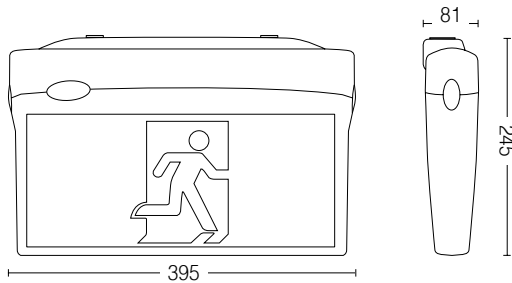

| CODE | DESCRIPTION | POWER [~] | LUMENS* | EFFICACY | WEIGHT |
|------------|----------------------------------|--------------------|---------|----------|--------|
| STLED-L | 5W MAINTAINED WHITE EMGY MODE | 5W 1W | 27lm | 27lm/W | 1.2kg |
| STTLED-L | 5W MAINTAINED BLACK EMGY MODE | 5W 1W | 27lm | 27lm/W | 1.2kg |
| AQUALOCK-W | IP65 AQUALOCK ENCLOSURE | | | | |

*Delivered lumens from luminaire, including thermal, electrical and optic losses. [~]Tested system powers from luminaire.